



SOLAR STIK™

MARINE TRANSOM MOUNT MINI FOOT




OVERVIEW

The Mini Foot is designed for Transom Mount installations where the base of the Mount is installed close to the surface. This may be due to restrictions on the installed Mast height due to boom-swing or canvas structures, or on sterns that have a severe angle on the designated mounting surface.

Constructed of T6061 aluminum, the Mini Foot makes the overall installation naturally more stable due to the lack of Lower Support Arm length.




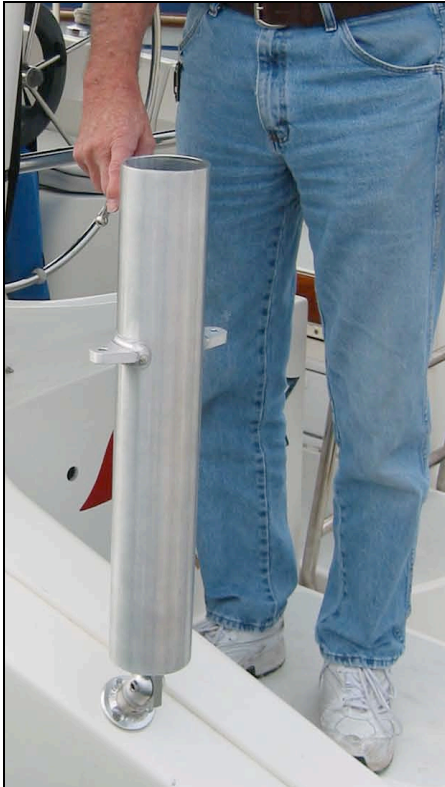

Stand-off distance is just 2” and there is no need to utilize the pin that is usually installed through the assembly on the lower Transom Mount Ear to set the pitch of the foot. (See Transom Mount Manual)

The Mini Foot has a swing radius of 45 degrees. The pad diameter is 3 inches with 4 holes for 1/4” mounting hardware (not included).

It is recommended that the Mini Foot be secured to the vessel by through-bolting the foot to the stern using fender washers or the included backing plate.

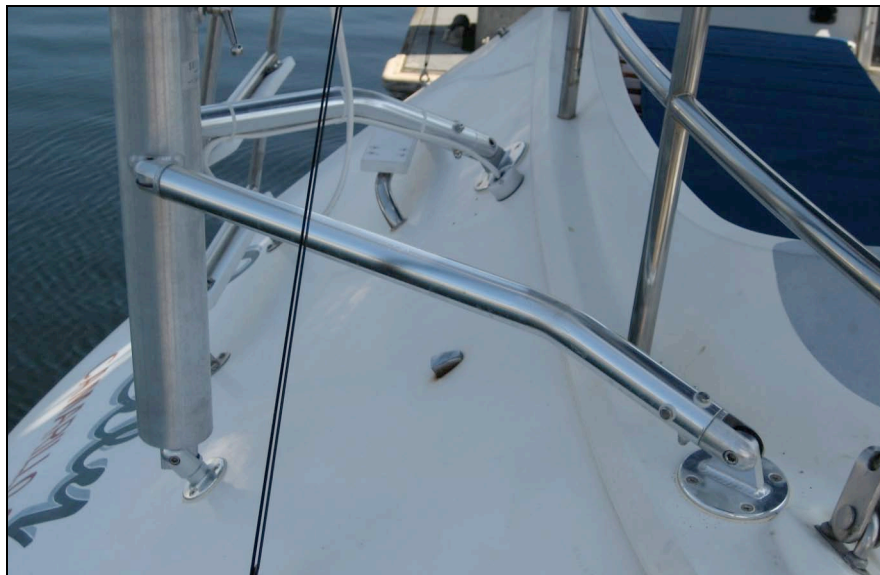

Solar Stik™ Inc. will not be held liable for improper installation or any damage to corresponding equipment as a result of poor installation.

TECHNICAL SUPPORT LINE: 800-793-4364 (available weekdays 7AM to 7PM EST and Sat - Sun 9AM to 4PM EST)

ADDRESS: Solar Stik™ R&D Facility
226 1/2 West King Street
Saint Augustine, Florida 32084

For more information, visit the website WWW.SOLARSTIK.COM

041008